


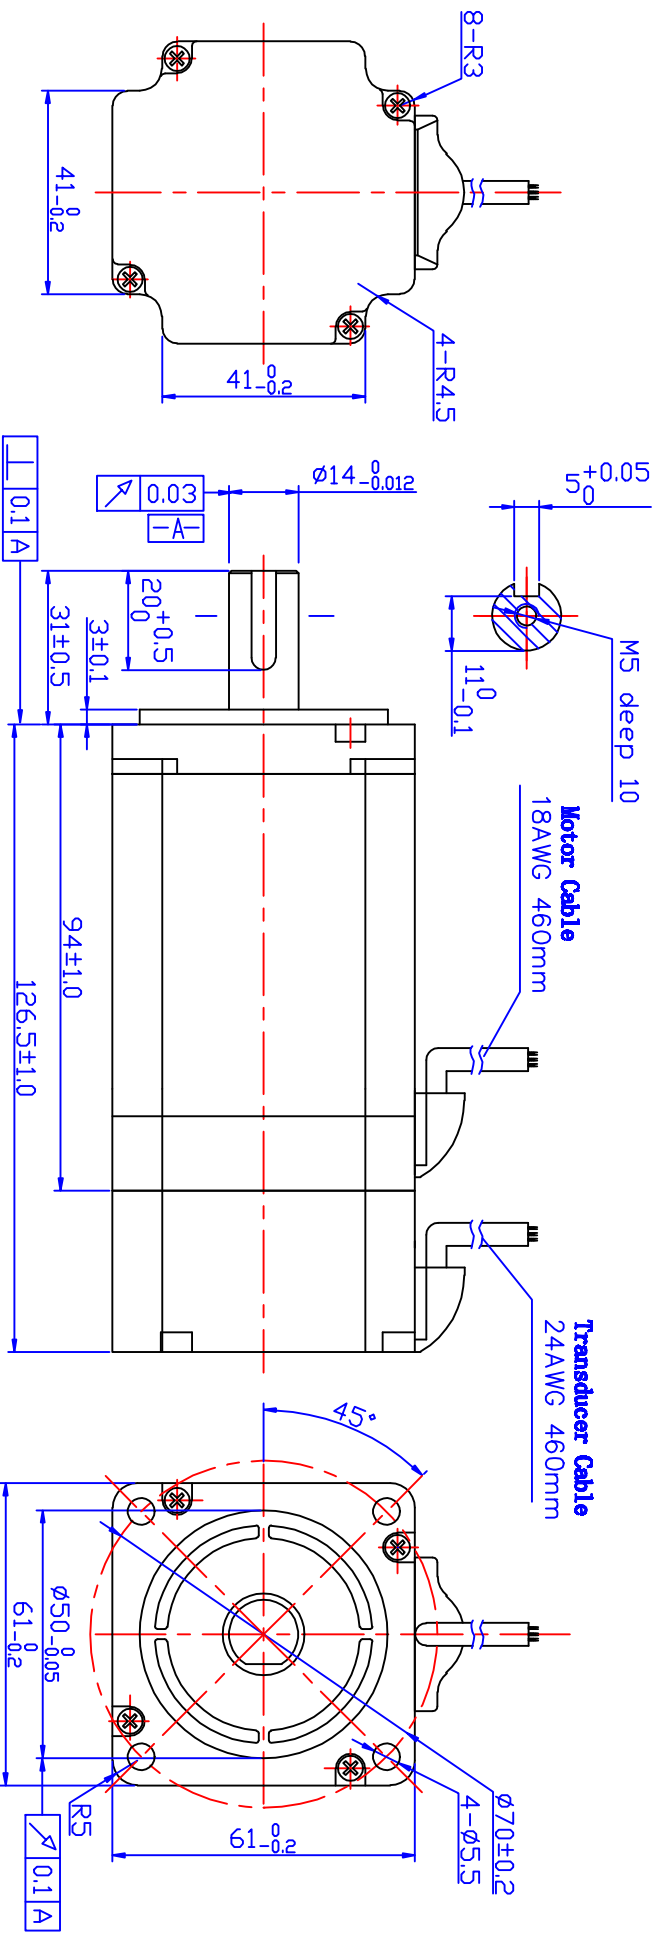


技术参数 Specification:

項目 Item	範圍 Range	單位 unit	參數值 Value
額定電壓 Voltage		V	48
額定轉矩 Torque		N.m	0.8
額定轉速 Speed	±10%	RRM	1500
額定電流 Current	±10%	A	3.5
功率 Power		W	125
重量 Weight		Kg	1.6

Technical requirements:


1. No tolerance dimensions according to the tolerance standard of GB1804-m.
2. Dielectric strength test at 1200VAC, 2mA, 1S.
3. Axial clearance (two-way) maximum is 0.25mm.
4. The motor rotating flexible Without getting stuck etc. bad phenomenon.

时序图Timing diagram

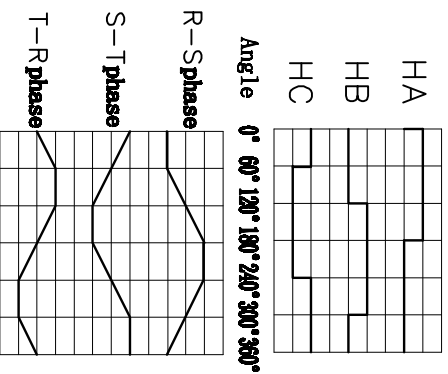

前轴伸顺时针方向旋转
CW view from shaft side

线路图 Wiring diagram



Motor Cable:

Pin	Color	Function
1	RED	R phase
2	WHITE	S phase
3	BLACK	T phase
4		Shield

Transducer Cable:

Pin	Color	Function
1	RED	+VCC
2	BLACK	Ground
3	BROWN	HALL A
4	ORANGE	HALL B
5	YELLOW	HALL C
6		Shield

常州宝来电器有限公司 Baolai Electric Appliance									
60SW300 共 1 张 第 1 张 设计 审核 工艺 170228 标准化 图样标记 重量 比例 更改说明 签字 日期 版本 日期									