



时序图Timing diagram




Angle 0° 60° 120° 180° 240° 300° 360°

R-S Phase  
S-T Phase  
T-R Phase



前轴伸顺时针方向旋转  
CW view from shaft side

线路图 Wiring diagram

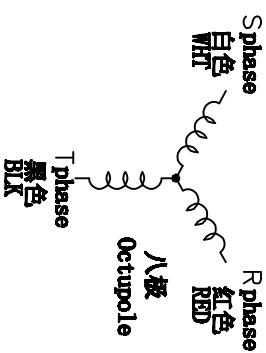

Motor Cable:

Pin	Color	Function
1	RBD	R phase
2	WHITE	S phase
3	BLACK	T phase
4		Shield

Transducer Cable:

Pin	Color	Function
1	RBD	+VCC
2	BLACK	Ground
3	BROWN	HALL A
4	ORANGE	HALL B
5	YELLOW	HALL C
6		Shield

技术参数 Specification:

项目 Item	范围 Range	单位 unit	参数值 Value
额定电压 Voltage		V	24
额定转矩 Torque		N.m	0.2
额定转速 Speed	±10%	RRM	2300
额定电流 Current	±10%	A	3.5
功率 Power		W	50
重量 Weight		Kg	0.4

Technical requirements:

1. Dielectric strength test at 1700VAC, 2mA, 1S.
2. Axial clearance (two-way) maximum is 0.25mm.
3. The motor rotating flexible Without getting stuck etc. bad phenomenon.

版本		更改文件号	签字	日期	42SW200		常州宝来电器有限公司 BaoLai Electric Appliance
设计	170228	标准化			物料标记	重量	
审核					比例	1:1	常州宝来电器有限公司 BaoLai Electric Appliance
工艺					共 1 张 第 1 张		info@baolai-cn.com www.baolai-cn.com