


技术参数 Specification:

项目 Item	范围 Range	单位 unit	参数值 Value
额定电压 Voltage		V	48
额定转矩 Torque		N.m	0.8
额定转速 Speed	±10%	RRM	1500
额定电流 Current	±10%	A	3.5
功率 Power		W	125
重量 Weight		Kg	1.6


Technical requirements:

1. No tolerance dimensions according to the tolerance standard of GB1804-m.
2. Dielectric strength test at 1200VAC, 2mA, 1S.
3. Axial clearance (two-way) maximum is 0.25mm.
4. The motor rotating flexible Without getting stuck etc. bad phenomenon.

时序图 Timing diagram




Angle 0° 60° 120° 180° 240° 300° 360°

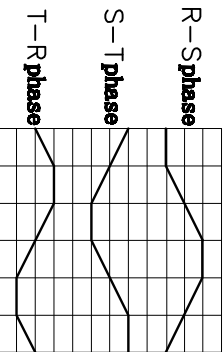

前轴伸顺时针方向旋转
CW view from shaft side

线路图 Wiring diagram

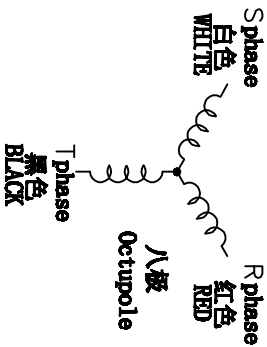

Motor Cable:

Pin Color	Function
1 RED	R phase
2 WHITE	S phase
3 BLACK	T phase
4	Shield

Transducer Cable:

Pin Color	Function
1 RED	+VCC
2 BLACK	Ground
3 BROWN	HALL A
4 ORANGE	HALL B
5 YELLOW	HALL C
6	Shield

常州宝来电器有限公司
Baolai Electric Appliance

info@baolai-cn.com
www.baolai-cn.com

版本	更改说明	签字	日期	图样标记	数量	比例
设计	170228	标准化				1:1
审核						
工艺		批准				

共 1 张 第 1 张