


技术参数 Specification:

项目 Item	范围 Range	单位 unit	参数值 Value
额定电压 Voltage		V	48
额定转矩 Torque		N.m	0.8
额定转速 Speed	±10%	RRM	2000
额定电流 Current	±10%	A	4.5
功率 Power		W	160
重量 Weight		Kg	2.1

Technical requirements:


1. No tolerance dimensions according to the tolerance standard of GB1804-m.
2. Dielectric strength test at 1200VAC, 2mA, 1S.
3. Axial clearance (two-way) maximum is 0.25mm.
4. The motor rotating flexible Without getting stuck etc. bad phenomenon.

时序图 Timing diagram

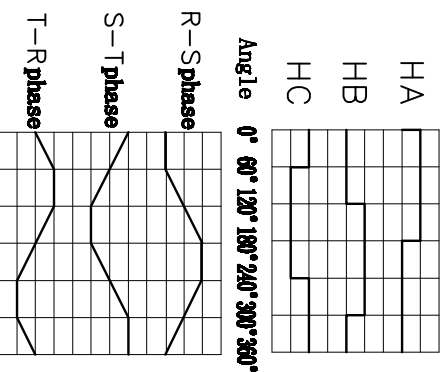

前轴伸侧时针方向旋转
CW view from shaft side

线路图 Wiring diagram



Motor Cables:

Pin	Color	Function
1	RED	R phase
2	WHITE	S phase
3	BLACK	T phase
4		Shield

Transducer Cables:

Pin	Color	Function
1	RED	+VCC
2	BLACK	Ground
3	BROWN	HALL A
4	ORANGE	HALL B
5	YELLOW	HALL C
6		Shield

常州宝来电器有限公司
Baolai Electric Appliance

info@baolai-cn.com
www.baolai-cn.com

版本	更改说明	签字	日期
设计	QC	170228	标准化
审核			
工艺		批准	

图样标记	重量	比例
	1.6Kg	1:1

共 1 张 第 1 张