


技术参数 Specifications:

项目 Item	范围 Range	单位 unit	参数值 Value
额定电压 Voltage		V	48
额定转矩 Torque		N.m	0.8
额定转速 Speed	$\pm 10\%$	RRM	4000
额定电流 Current	$\pm 10\%$	A	9.2
功率 Power		W	330
重量 Weight		Kg	2.1


Technical requirements:

1. No tolerance dimensions according to the tolerance standard of GB1804-m.
2. Dielectric strength test at 1200VAC, 2mA, 1S.
3. Axial clearance (two-way) maximum is 0.25mm.
4. The motor rotating flexible Without getting stuck etc. bad phenomenon.

时序图 Timing diagram

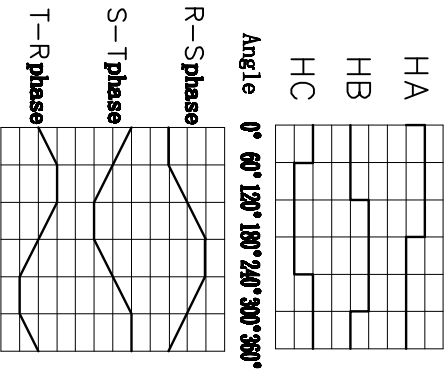

线路图 Wiring diagram



Motor Cables:

Pin Color	Function
1 RED	R phase
2 WHITE	S phase
3 BLACK	T phase
4	Shield

Transducer Cables:

Pin Color	Function
1 RED	+VCC
2 BLACK	Ground
3 BROWN	HALL A
4 ORANGE	HALL B
5 YELLOW	HALL C
6	Shield

前轴伸顺时针方向旋转  
CW view from shaft side

版本	更改说明	签字	日期
设计 QT	170228		
审核			
工艺			

图样标记	重量	比例
	1.6kg	1:1

共 1 张	第 1 张
-------	-------

常州宝来电器有限公司 Nootal Electric Appliance	info@baolai-cn.com www.baolai-cn.com
---	---